




Surface Read-Out Capabilities for MPLT Logging

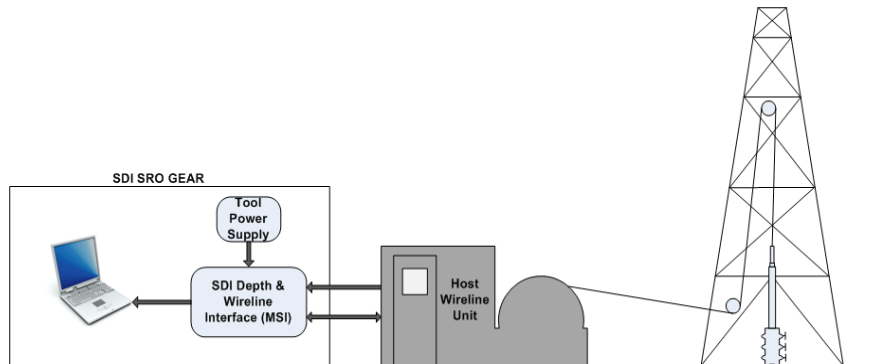

Scientific Drilling's Surface Read-Out System

- SRO Module replaces Memory Module to communicate live data to the surface PC
- All of the SDI SRO Gear is easily set up in the Host wireline unit
- Real-time display of log data is available on the PC
- Interface panel ties into Host unit's wireline and depth/tension systems
- Compatible with any wireline company as Host
- Uses single or multiconductor wireline
- Available with standard 1-3/8 inch MPLT toolstring (shown on right) and flaked high temperature MPLT toolstring

